

MetaLight™ Linear Front Light Model#: LFL2X11



- Shock and Vibration proof up to 10 G's per MIL-STD-910F the highest industry standards
- Solid one-piece machined aluminum housings and thermal potting
- Performance extends to rugged environments
- Can be configured for wavelength and other specifications
- Equipt with pairing and axial rotation capabilities

Part #	Color	Power Supply	Specifications:	
LFL2X11-W-24	White 5500K	24 volt power supply available upon request.	Current Consumption	1.05A @ 24VDC
LFL2X11-R-24	Red 630nm		Housing	Aluminum
LFL2X11-B-24	Blue 455nm		Finish	Anodized
LFL2X11-G-24	Green 530nm		Intensity Uniformity	+/-5%
LFL2X11-IRN-24	Infrared 850nm		Operating Temperature	120° F Max
LFL2X11-IRL-24	Infrared 880nm		Illuminance	75,000 Lux
LFL2X11-UVL-24	UV 395nm		Compliance	CE/RoHS
LFL2X11-UVS-24	UV 365nm		Lifetime Hours	75,000 Hours

10 ft. flying leads come standard on all products.
Light features built-in constant current driver.
No expensive controller required.

Active Area	Dimensions
1 in x 65 in 25.4mm x 1651mm	66.81in x 1.13in x 1.25in 1696mm x 28.58mm x 31.75mm

ORDERING INFORMATION:

• L F L 2 x 1 1 - - 2 4 -


W	White 5500k	*BLANK	10 ft. Flying Leads
R	Red 630nm	T	M12 Quick Disconnect
G	Green 530nm	ILD	In Line Dimmer
B	Blue 455 nm	ILS	In Line Strobe (customer provide trigger info)
IRL	Infrared 880nm		
UVL	(long) 395nm		
UVS	(short) 365nm		

MetaLight™ Linear Front Light Model#: LFL2X11

Wiring Diagram

M12 Connector

PIN #	Function
1	+24VDC
2	0-10VDC Intensity Control
3	Ground
4	Signal Ground

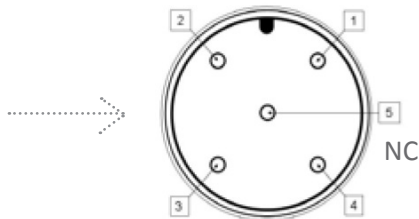

Flying Leads	Function
RED	+24VDC
BLACK	Ground
WHITE	+24VDC
GREEN	Ground

24 AWG 4 WIRES CABLE X 1

When not using intensity control, connect 0-10V control line to +24 (Max Intensity Control = 25V) and intensity control ground to ground

Drawing/Diagram

Technical drawing showing top, side, and end views of the LFL2X11 linear front light. Dimensions are provided in inches and millimeters. Key dimensions include: top view (width 12.00 [304.8], height 2.72 [69.1], pin spacing 2.20 [56], 4.18 [106.2], 3.63 [92.2], 7.63 [193.8], 1.36 [34.5], 1.25 [31.8], 0.73 [18.6]), side view (height 1.86 [47.2], 2.04 [51.9]), and end view (width 1.00 [25.4]). A note indicates '1/4-20 THREADED INSERT (4) PLACES' and 'ELECTRICAL CABLE, 10 FT. LG (4) CONDUCTOR, 22 AWG WITH FLYING LEADWIRE ENDS'.

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED

UNLESS OTHERWISE SPECIFIED:	NAME	DATE	METAPHASE TECHNOLOGIES, INC.
DIMENSIONS ARE IN INCHES	DRAWN	KW	4/23/2012
TOLERANCES:	CHECKED		
FRACTIONAL #/164			
ANGLES AND DECIMALS 1/16" & 1/32"	ENG. APPL.		
1/8" & 3/16" DECIMAL #/16	APP. APPL.		
3/32" & 1/4" DECIMAL #/16			
1/2" & 3/4" DECIMAL #/8			
1" & 2" DECIMAL #/4			
3" & 4" DECIMAL #/2			
5" & 6" DECIMAL #/1			
7" & 8" DECIMAL #/1			
10" & 12" DECIMAL #/1			
16" & 24" DECIMAL #/1			
30" & 48" DECIMAL #/1			
60" & 96" DECIMAL #/1			
120" & 192" DECIMAL #/1			
240" & 480" DECIMAL #/1			
480" & 960" DECIMAL #/1			
960" & 1920" DECIMAL #/1			
1920" & 3840" DECIMAL #/1			
3840" & 7680" DECIMAL #/1			
7680" & 15360" DECIMAL #/1			
15360" & 30720" DECIMAL #/1			
30720" & 61440" DECIMAL #/1			
61440" & 122880" DECIMAL #/1			
122880" & 245760" DECIMAL #/1			
245760" & 491520" DECIMAL #/1			
491520" & 983040" DECIMAL #/1			
983040" & 1966080" DECIMAL #/1			
1966080" & 3932160" DECIMAL #/1			
3932160" & 7864320" DECIMAL #/1			
7864320" & 15728640" DECIMAL #/1			
15728640" & 31457280" DECIMAL #/1			
31457280" & 62914560" DECIMAL #/1			
62914560" & 125829120" DECIMAL #/1			
125829120" & 251658240" DECIMAL #/1			
251658240" & 503316480" DECIMAL #/1			
503316480" & 1006632960" DECIMAL #/1			
1006632960" & 2013265920" DECIMAL #/1			
2013265920" & 4026531840" DECIMAL #/1			
4026531840" & 8053063680" DECIMAL #/1			
8053063680" & 16106127360" DECIMAL #/1			
16106127360" & 32212254720" DECIMAL #/1			
32212254720" & 64424509440" DECIMAL #/1			
64424509440" & 128849018880" DECIMAL #/1			
128849018880" & 257698037760" DECIMAL #/1			
257698037760" & 515396075520" DECIMAL #/1			
515396075520" & 1030792151040" DECIMAL #/1			
1030792151040" & 2061584302080" DECIMAL #/1			
2061584302080" & 4123168604160" DECIMAL #/1			
4123168604160" & 8246337208320" DECIMAL #/1			
8246337208320" & 16492674416640" DECIMAL #/1			
16492674416640" & 32985348833280" DECIMAL #/1			
32985348833280" & 65970697666560" DECIMAL #/1			
65970697666560" & 131941395333120" DECIMAL #/1			
131941395333120" & 263882790666240" DECIMAL #/1			
263882790666240" & 527765581332480" DECIMAL #/1			
527765581332480" & 1055531162664960" DECIMAL #/1			
1055531162664960" & 2111062325329920" DECIMAL #/1			
2111062325329920" & 4222124650659840" DECIMAL #/1			
4222124650659840" & 8444249301319680" DECIMAL #/1			
8444249301319680" & 16888498602639360" DECIMAL #/1			
16888498602639360" & 33776997205278720" DECIMAL #/1			
33776997205278720" & 67553994410557440" DECIMAL #/1			
67553994410557440" & 135107988821114880" DECIMAL #/1			
135107988821114880" & 270215977642229760" DECIMAL #/1			
270215977642229760" & 540431955284459520" DECIMAL #/1			
540431955284459520" & 1080863910568919040" DECIMAL #/1			
1080863910568919040" & 2161727821137838080" DECIMAL #/1			
2161727821137838080" & 4323455642275676160" DECIMAL #/1			
4323455642275676160" & 8646911284551352320" DECIMAL #/1			
8646911284551352320" & 17293822569102704640" DECIMAL #/1			
17293822569102704640" & 34587645138205409280" DECIMAL #/1			
34587645138205409280" & 69175290276410818560" DECIMAL #/1			
69175290276410818560" & 138350580552821637120" DECIMAL #/1			
138350580552821637120" & 276701161105643274240" DECIMAL #/1			
276701161105643274240" & 553402322211286548480" DECIMAL #/1			
553402322211286548480" & 11068046442225730919680" DECIMAL #/1			
11068046442225730919680" & 22136092884451461839360" DECIMAL #/1			
22136092884451461839360" & 44272185768902923678720" DECIMAL #/1			
44272185768902923678720" & 88544371537805847357440" DECIMAL #/1			
88544371537805847357440" & 177088743075611694714880" DECIMAL #/1			
177088743075611694714880" & 354177486151223389429760" DECIMAL #/1			
354177486151223389429760" & 708354972302446778859520" DECIMAL #/1			
708354972302446778859520" & 1416709944604893557719040" DECIMAL #/1			
1416709944604893557719040" & 2833419889209787115438080" DECIMAL #/1			
2833419889209787115438080" & 5666839778419574230876160" DECIMAL #/1			
5666839778419574230876160" & 11333679556839148461752320" DECIMAL #/1			
11333679556839148461752320" & 22667359113678296923504640" DECIMAL #/1			
22667359113678296923504640" & 45334718227356593847009280" DECIMAL #/1			
45334718227356593847009280" & 90669436454713187694018560" DECIMAL #/1			
90669436454713187694018560" & 181338872909426375388031360" DECIMAL #/1			
181338872909426375388031360" & 362677745818852750776062720" DECIMAL #/1			
362677745818852750776062720" & 725355491637705501552125440" DECIMAL #/1			
725355491637705501552125440" & 1450710983275411003104250880" DECIMAL #/1			
1450710983275411003104250880" & 2901421966550822006208501760" DECIMAL #/1			
2901421966550822006208501760" & 5802843933101644012417003520" DECIMAL #/1			
5802843933101644012417003520" & 11605687866203288024834007040" DECIMAL #/1			
11605687866203288024834007040" & 23211375732406576049668014080" DECIMAL #/1			
23211375732406576049668014080" & 46422751464813152099336028160" DECIMAL #/1			
46422751464813152099336028160" & 92845502929626304198672056320" DECIMAL #/1			
92845502929626304198672056320" & 185691005859252608397344112640" DECIMAL #/1			
185691005859252608397344112640" & 371382011718505216794688225280" DECIMAL #/1			
371382011718505216794688225280" & 742764023437010433589376450560" DECIMAL #/1			
742764023437010433589376450560" & 1485528046874020867178752901120" DECIMAL #/1			
1485528046874020867178752901120" & 2971056093748041734357505802240" DECIMAL #/1			
2971056093748041734357505802240" & 5942112187496083468715011604480" DECIMAL #/1			
5942112187496083468715011604480" & 11884224374992166937430022088960" DECIMAL #/1			
11884224374992166937430022088960" & 23768448749984333874860044177920" DECIMAL #/1			
23768448749984333874860044177920" & 47536897499968667749720088355840" DECIMAL #/1			
47536897499968667749720088355840" & 95073794999937335499440176711680" DECIMAL #/1			
95073794999937335499440176711680" & 190147589999874670998880354223360" DECIMAL #/1			
190147589999874670998880354223360" & 380295179999749341997760708446720" DECIMAL #/1			
380295179999749341997760708446720" & 760590359999498683995521416893440" DECIMAL #/1			
760590359999498683995521416893440" & 1521180719998973767991042833786880" DECIMAL #/1			
1521180719998973767991042833786880" & 3042361439997947535982085667573760" DECIMAL #/1			
3042361439997947535982085667573760" & 6084722879995895071964171335147520" DECIMAL #/1			
6084722879995895071964171335147520" & 12169445759991790143928342670295040" DECIMAL #/1			
12169445759991790143928342670295040" & 24338891519983580287856685340590080" DECIMAL #/1			
24338891519983580287856685340590080" & 48677783039967160575713370681180160" DECIMAL #/1			
48677783039967160575713370681180160" & 97355566079934321151426741362360320" DECIMAL #/1			
97355566079934321151426741362360320" & 19471113215986864230285348272472640" DECIMAL #/1			
19471113215986864230285348272472640" & 38942226431973728460570696544945280" DECIMAL #/1			
38942226431973728460570696544945280" & 77884452863947456921141383089890560" DECIMAL #/1			
77884452863947456921141383089890560" & 155768905727894913842228266179781120" DECIMAL #/1			
155768905727894913842228266179781120" & 311537811455789827684456532359562240" DECIMAL #/1			
311537811455789827684456532359562240" & 623075622911579655368913064719124480" DECIMAL #/1			
623075622911579655368913064719124480" & 1246151245823159310737826129438248960" DECIMAL #/1			
1246151245823159310737826129438248960" & 2492302491646318621475652258876497920" DECIMAL #/1			
2492302491646318621475652258876497920" & 4984604983292637242951304517752995840" DECIMAL #/1			
4984604983292637242951304517752995840" & 9969209966585274485902609035505991680" DECIMAL #/1			
9969209966585274485902609035505991680" & 19938419933170548971805218071011983360" DECIMAL #/1			
19938419933170548971805218071011983360" & 39876839866341097943610436142023966720" DECIMAL #/1			
39876839866341097943610436142023966720" & 79753679732682195887220872284047933440" DECIMAL #/1			
79753679732682195887220872284047933440" & 159507359465364391774441744568095866880" DECIMAL #/1			
159507359465364391774441744568095866880" & 319014718930728783548883489136191733760" DECIMAL #/1			
319014718930728783548883489136191733760" & 638029437861457567097766978272383467520" DECIMAL #/1			
638029437861457567097766978272383467520" & 1276058875722915134195533956544766935040" DECIMAL #/1			
1276058875722915134195533956544766935040" & 2552117751445830268391067913089333870080" DECIMAL #/1			
2552117751445830268391067913089333870080" & 5104235502891660536782135826178667741440" DECIMAL #/1			
5104235502891660536782135826178667741440" & 102084710057833210735642716523573354880" DECIMAL #/1			
102084710057833210735642716523573354880" & 204169420			