


## MetaBright™ Area Backlight

Model#: MB-BL24X24

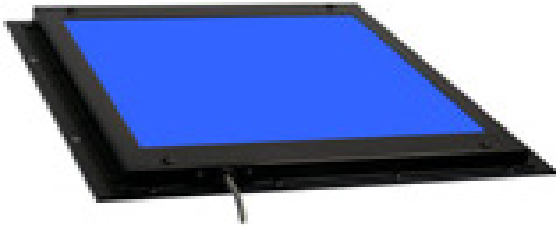


- Up to 50 SMD LED's per inch array makes our backlights the brightest most stable backlights in the industry
- Exclusive optical lens producing even (+/- 5%), shadow-free illumination
- High Density Precision Chip technology
- Patent-pending thermal management design draws heat directly from the die ensuring long life
- Stable, flicker-free illumination with instant-start operation

Wiring Diagram		M12 Connector		Specifications:	
Flying Leads	Function	PIN #	Function	Current Consumption	16 ~ 20 @ 24Vdc
RED	+24VDC	1	+24VDC	Housing	Aluminum
BLACK	Ground	2	0-10VDC Intensity Control	Finish	Powder Coated Black
WHITE	0~10V	3	Ground	Intensity Uniformity	+/-5%
GREEN	Signal Ground	4	Signal Ground	Illuminance	60,000 Lux
				Operating Temperature	120° F Max
				Compliance	CE/RoHS
				Lifetime Hours	75,000 Hours

Active Area	Dimensions
24in x 24in 609.6mm x 609.6	29.2in x 30.1in x 1.0in 741.68mm x 764.54mm x 25.4mm



### ORDERING INFORMATION:

• M B - B L 2 4 X 2 4	-	<input type="checkbox"/>	- 2 4 -	<input type="checkbox"/>	
<b>W</b>				<b>*BLANK</b>	10 ft. Flying Leads
<b>R</b>	White 6000k			<b>T</b>	M12 Quick Disconnect
<b>G</b>	Red 630nm			<b>ILD</b>	In Line Dimmer
<b>B</b>	Green 530nm			<b>ILS</b>	In Line Strobe (customer provide trigger info)
<b>IR</b>	Blue 455 nm				
<b>UVL</b>	Infrared 880nm				
<b>UVS</b>	(long) 395nm				
	(short) 365nm				

## MetaBright™ Area Backlight

Model#: MB-BL24X24

Contact us:

Contact your Metaphase Technologies Representative for options including: Diffuser Choice, Polarizer & Light Control Film, Specific Intensity & Uniformity, & Wavelength.

### Drawing/Diagram

