


MetaBright™ Area Backlight Model#: MB-BL6X20



- Up to 50 SMD LED's per inch array makes our backlights the brightest most stable backlights in the industry
- Exclusive optical lens producing even (+/- 5%), shadow-free illumination
- High Density Precision Chip technology
- Patent-pending thermal management design draws heat directly from the die ensuring long life
- Stable, flicker-free illumination with instant-start operation

Wiring Diagram		M12 Connector		Specifications:	
Flying Leads	Function	PIN #	Function		
RED	+24VDC	1	+24VDC	Current Consumption	3 ~ 4 Amp @ 24Vdc
BLACK	Ground	3	Ground	Housing	Aluminum
WHITE	0~10V			Finish	Powder Coated Black
GREEN	Signal Ground			Intensity Uniformity	+/-5%
				Operating Temperature	120° F Max
				Illuminance	37,000 Lux
				Compliance	CE/RoHS
				Lifetime Hours	75,000 Hours

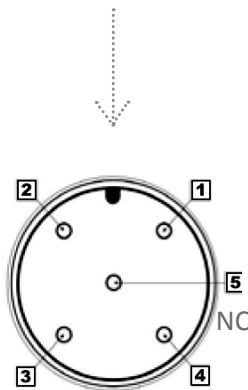

Active Area	Dimensions
6in x 20in 152.4mm x 508mm	7.25 in x 23.86 in x 0.94 in 184.15mm x 606.04mm x 23.87mm

ORDERING INFORMATION:

• MB - BL 6 X 2 0	-	□	- 2 4 -	□	
		W	White 6000k	*BLANK	10 ft. Flying Leads
		R	Red 630nm	T	M12 Quick Disconnect
		G	Green 530nm	ILD	In Line Dimmer
		B	Blue 455 nm	ILS	In Line Strobe (customer provide trigger info)
		IR	Infrared 880nm		
		UVL	(long) 395nm		
		UVS	(short) 365nm		

MetaBright™ Area Backlight Model#: MB-BL6X20

	Wavelength (nanometers)
White (°K)	5500-6500°K
Blue	464-485
Green	520-535
Red	620-630
IRN	880
UVL	395
UVS	365

Contact us:

Contact your Metaphase Technologies Representative for options including: Diffuser Choice, Polarizer & Light Control Film, Specific Intensity & Uniformity, & Wavelength.

