


MetaBright™ Area Backlight Model#: MB-BL8X32



- Up to 50 SMD LED's per inch array makes our backlights the brightest most stable backlights in the industry
- Exclusive optical lens producing even (+/- 5%), shadow-free illumination
- High Density Precision Chip technology
- Patent-pending thermal management design draws heat directly from the die ensuring long life
- Stable, flicker-free illumination with instant-start operation

Wiring Diagram		M12 Connector		Specifications:	
Flying Leads	Function	PIN #	Function		
RED	+24VDC	1	+24VDC	Current Consumption	4 ~ 6 Amp @ 24Vdc
BLACK	Ground	3	Ground	Housing	Aluminum
WHITE	+24VDC			Finish	Powder Coated Black
GREEN	Ground			Intensity Uniformity	+/-5%
				Operating Temperature	120° F Max
				Illuminance	37,000 Lux
				Compliance	CE/RoHS
				Lifetime Hours	75,000 Hours

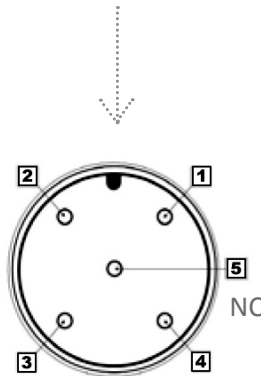

Active Area	Dimensions
8in x 32in	13.6 in x 37.48 in x 1 in
203.2mm x 812.8mm	40.64mm x 951.99mm x 25.4mm

ORDERING INFORMATION:

• M B - B L 8 X 3 2 - - 2 4 -

W	White 6000k	*BLANK	10 ft. Flying Leads
R	Red 630nm	T	M12 Quick Disconnect
G	Green 530nm	ILD	In Line Dimmer
B	Blue 455 nm	ILS	In Line Strobe (customer provide trigger info)
IR	Infrared 880nm		
UVL	(long) 395nm		
UVS	(short) 365nm		

MetaBright™ Area Backlight Model#: MB-BL8X32

	Wavelength (nanometers)
White (°K)	5500-6500°K
Blue	464-485
Green	520-535
Red	620-630
IRN	880
UVL	395
UVS	365

Contact us:

Contact your Metaphase Technologies Representative for options including: Diffuser Choice, Polarizer & Light Control Film, Specific Intensity & Uniformity, & Wavelength.

