



i

## microEnable 5 AD8-PoCL ironman

### Product Profile of microEnable 5 AD8-PoCL ironman

Scalable, intelligent high performance frame grabber for ultimate requirements on image acquisition and preprocessing by robust industrial MV standards

- ◆ Camera Link Full/Deca format standard
- ◆ Professional high quality color support
- ◆ Onboard color reconstruction
- ◆ Industrial multi-device, multi-camera support
- ◆ DMA3600 / up to 3,6 GB/s PCIe Data bandwidth (PCIe x8 Gen2)
- ◆ Support of line and area scan color cameras
- ◆ Broad support of Third-party software interfaces
- ◆ Versatile application and industry usage
- ◆ Flexible and extensible model series
- ◆ PoCL SafePower



## Technical Description

microEnable 5 frame grabber with 4\* CoaXPress ports (DIN 1.0/2.3 type) for 1 to 4\* cameras (CXP-1 to CXP-6), 1 GB DDR3-RAM image acquisition buffer, PCIe x8 (Gen 2) PC-interface. Pre-licensed for VisualApplets (Base) and SmartApplets (Base). Support of PoCXP (Power over CoaXPress) with SafePower. Documentation, SDK, supporting software tools, functional libraries with acquisition applets and drivers in delivery.

### Article Details

Product Name	microEnable 5 AD8-PoCL ironman
Match Code	mE5-AD8PCL
Article No.	150301
Category	A-Series (image acquisition board)

### Device Features

Processor	System Processor
On Board Memory	1 GByte DDR3-RAM
Processor Board Interface	n/a
Data Forwarding	n/a
I/O Module Interfaces	Trigger/GPIO-IF (Opto Trigger, TTL Trigger)



## Camera Interface

Standard	Camera Link 2.0, up to 85 MHz Pixel Clock
Configurations	CL-full, CL-deca (80bit), including non-Standard formats: Bilinear color
Connectors	2* MDR26
Cable Length	standard conform
Power Output	PoCL SafePower, 4W/12V per cable
Camera Support	Area scan camera, line scan camera
Sensor Type	Grayscale sensor, CFA sensor (Bayer), RGB sensor
Sensor Resolution	16k*64k (area scan sensor), 16k (line scan sensor)
Bit Depth	8-16-bit (grayscale), 24-48-bit (color)
Data Bandwidth	850 MB/s
Test Environment	Camera Simulator

## Controls and General Purpose I/Os

Trigger Board GPIO Interfaces	TTL Trigger board: 8 TTL in and 8 TTL out, max. input freq: 20 MHz; Opto Trigger boards (options): Up to 8 single-ended opto-coupled in (4,5V-28V) or 4 differential opto-coupled in (4,5-28V, RS422 compliant); 8 opto-coupled out (4,5V-28V), max. input freq: 1 MHz
On-board GPIO Interface	n/a
On-board Front GPIO Interface	n/a
Synchronization and Control	Configurable Trigger System supporting several trigger modes (grabber controlled, external trigger, gated, software trigger) and shaft encoder functionality with backward compensation, Multi-Camera-Synchronization
GPIO Summary	8in/8out (max.), TTL or opto-coupled



## Host PC Interface


PC Bus Interface	PCI Express x8 (Gen 2), DMA3600
PC Bus Interface Performance	up to 3.600 MB/s (sustainable)

## Physical and Environmental Information

Dimensions	PCIe Standard height, half length card: 167.64 mm length x 111.15 mm height
Approximate Weight	pending
Power Consumption / Power Source	14 V, 2.5 A
Operating Temperature	0 - 50°C (32°F - 122°F)
Storage Temperature	-50 - 80°C (-58°F - 176°F)
Relative Humidity	pending
MTBF	on request
Compliances	CE, RoHS, WEEE, REACH

## Software

Software Drivers	Windows 7 / 8 (32-bit), Windows 7 / 8 (64-bit), Linux 32-bit, Linux 64-bit
Software Tools	microDisplay (Acquisition control and viewer), microDiagnostics (Service tool), GenICam Explorer (Camera configuration tool), SDK, Documentation, Device Drivers
Software API	Silicon Software SDK, .net interface
FPGA Programming	not programmable
BV Software Compatibility	Common Vision Blox, Halcon

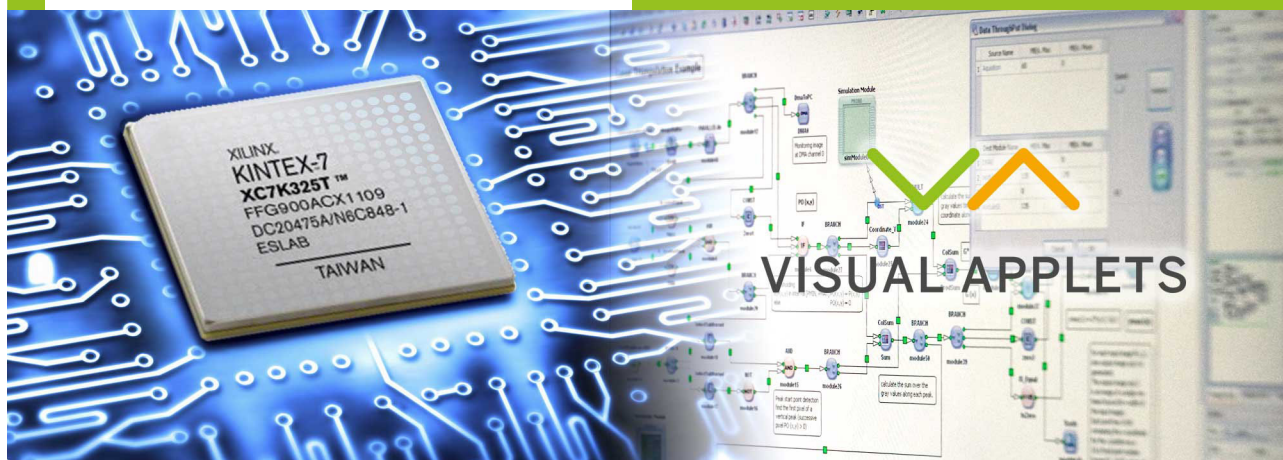

## VisualApplets

Often, the goal of industrial image processing applications is to find 100% of all errors and to work in high resolution to identify even the smallest details, to acquire images in the shortest time possible, to detect defects and to forward the results. These tasks frequently require more computing power than a "standard system" can offer. There are solutions that begin the image processing right after the acquisition process but before the camera images are written to storage and taken over by the software.

The processors used in such solutions are designed for image processing. They process data with extremely high parallelism, thus guaranteeing the necessary data throughput. On all its frame grabbers, Silicon Software uses this FPGA technology. In the A-Series (frame grabbers with expanded image recording functions), we have already programmed important and valuable functions that can be activated via the configuration software. For V-Series models (programmable frame grabbers for individual image processing functions), we have released the FPGA for you, as our customer, for individual programming.


To ease your entry into hardware programming, we have developed software that enables you to graphically program FPGAs using data flow diagrams. This program is called VisualApplets.

VisualApplets makes it possible for you to write complex applications on your own, even after a short time, for the special processor. Even without hardware programming expertise. The program is geared toward both software programmers and application engineers. Program in the language of image processors without using hardware code. The simulation works with a rapid image output with which you can immediately check your algorithms and image processing steps.

We have built in many automatic correction functions and generators so that you can concentrate on your actual work. And should an error sneak in, you are immediately made aware of it in color, and solution approaches are offered to you.

An SDK output generates executable example code in C/C++, listing all the parameters (hardware register), in order to control the image processing application out of your software.

What does real time mean? By using FPGA technology, you have a deterministic relationship to the application that works after the start with a constant delay (latency) that is determined by the image processing algorithm. In most cases, this latency lies in the micrometer range.

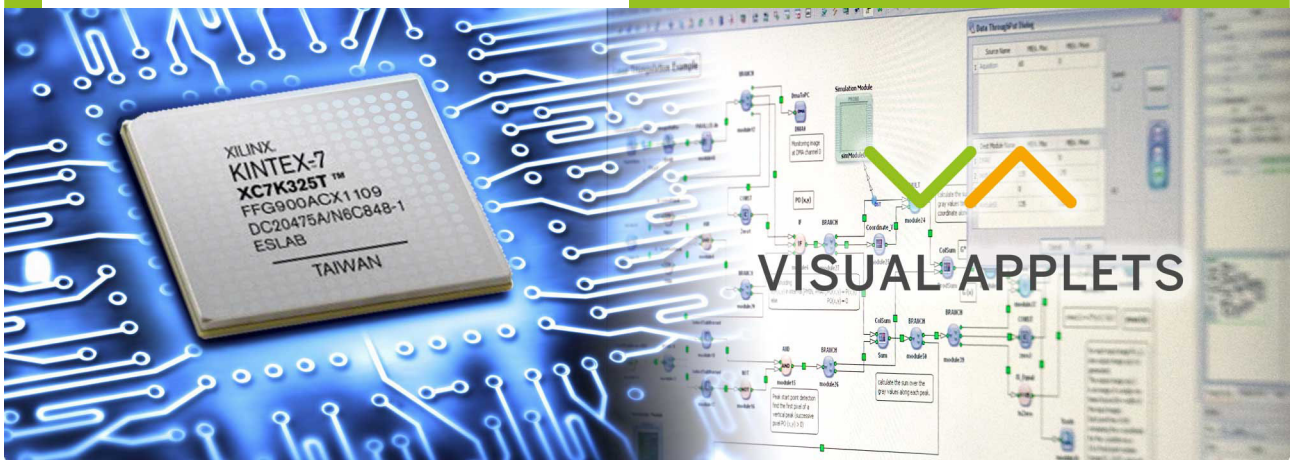

## VisualApplets (ctd.)

VisualApplets simplifies image processing programming for you. You can fall back on libraries with over 200 operators. You can create your own libraries for commonly used image processing steps or import them from available hardware code (EDIF over VHDL/Verilog).

With VisualApplets, you acquire a powerful tool that offers you new ways forward for your system solution.



VisualApplets is available for Silicon Software V-Series frame grabbers, including VisualApplets-compatible cameras and imaging devices.

V-Series frame grabbers are already pre-licensed for use with VisualApplets in the basic version. VisualApplets offers several versions of its programming environment; additionally, you can license further operator libraries to expand the range of functions.

In 2006, VisualApplets was honored with the international Vision Award. It has been successfully used in the most diverse industrial applications, both using frame grabbers and in VisualApplets-compatible industrial cameras and image processing devices.

## Technical Setup

Board/Housing Measurement	
Height	111,15 mm
Length	167.64 mm
Width	no width
Mounting	PCIe slot
Screw Mounting	no screw mounting
Protecion Class	no class defined
Material	PCB, RoHS compliant
Screws	no screws

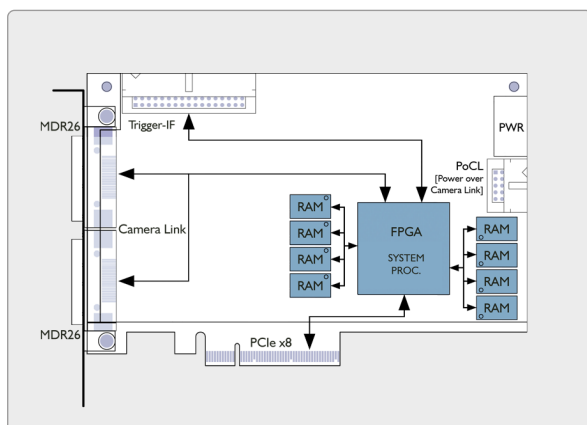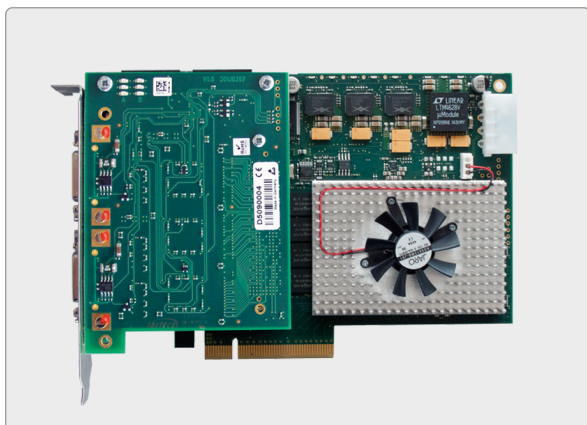

### PRODUCT VARIATIONS

- ◆ [microEnable 5 ironman VD8-PoCL](#)

### PRODUCT EXTENSIONS

- ◆ Opto-coupled Trigger Board - mE5  
Match Code: TRG-OPTO5, Art.No.: 155010
- ◆ Opto-coupled Trigger Board - mE4 (Pull up)  
Match Code: TRG-OPTO4-PU, Art.No.: 101266
- ◆ Opto-coupled Trigger Board - mE4 (Pull down)  
Match Code: RG-OPTO4-PD, Art No.: 101433
- ◆ Opto-coupled Trigger Board - mE4 (DS Pull up)  
Match Code: TRG-OPTO4-DSPU, Art No.: 101435
- ◆ Opto-coupled Trigger Board - mE4 (DS Pull down)  
Match Code: TRG-OPTO4-DSPD, Art No.: 101437
- ◆ Opto-coupled Trigger Board - mE4 (DS/SE Pull up)  
Match Code: TRG-OPTO4-DSSEPU, Art No.: 101443
- ◆ Opto-coupled Trigger Board - mE4 (DS/SE Pull down)  
Match Code: TRG-OPTO4-DSSEPD, Art No.: 101444
- ◆ TTL Trigger Board - mE4  
Match Code: TRG-TTL4, Art No.: 101248

### ORDERING INFO

- ◆ microEnable 5 AD8-PoCL ironman,  
mE5-AD8PCL, Art No.: 150301



Copyright © Silicon Software, 2016

Generated on 21. June 2016



Silicon Software GmbH  
Steubenstrasse 46  
68163 Mannheim  
Germany

[t] +49.621.798507-0  
[f] +49.621.798507-10  
[e] [info@silicon.software](mailto:info@silicon.software)  
[w] <https://silicon.software>



Silicon Software Inc  
1 Tara Boulevard, Suite 200  
Nashua, NH 03062  
USA

[t] +1.603.32471-72  
[f] +1.603.96609-56  
[e] [americas@silicon.software](mailto:americas@silicon.software)  
[w] <https://silicon.software>

We reserve the right of technical modifications, changes of the equipment features and adaptations to current specification. Typing and setting mistakes and other errors cannot be excluded and are therefore also reserved. In recent publications availability, also by technical generation, previous cease to be valid.