


SILICONSOFTWARE

V-Series Camera Link

microEnable IV VD4-CL

The fastest programmable PCIe x4 frame grabber for Camera Link world-wide

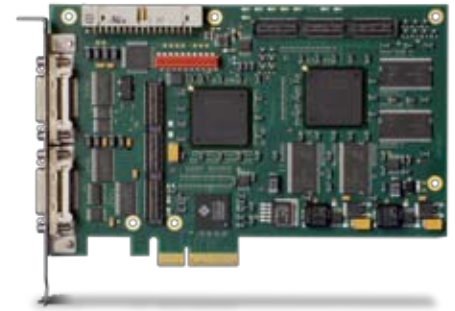

The microEnable IV VD4-CL is a programmable dual-port image processing board for two independent Base configuration, one Medium configuration, or one Full configuration Camera Link camera. With its DMA transfer rate of up to 900 MB/s the microEnable IV VD4-CL is the fastest PCIe x4 image processing board world-wide. As a result it supports the complete image transfer of the fastest 10-tap Full configuration Camera Link cameras.


All integrated image acquisition and image pre-processing functions of the microEnable IV VD4-CL are executed on the system FPGA in real time, and offer high performance and robust and reliable acquisition technology at the same time.

Additionally you can use SmartApplets for loading application-related image processing sequences. The processing takes place with high algorithmic quality and relieves the software-related image processing.




For implementing customized image processing the vision FPGA is able to be programmed with the graphical tool VisualApplets. The microEnable IV VD4-CL is pre-licensed for VisualApplets (Base) and SmartApplets (Base).

The trigger system of the microEnable IV VD4-CL possesses a wide functional range and high performance. As a result the user gains high flexibility and adaptability especially for line-scan camera applications.

Product Features

- ✓ Acquisition Buffer
 - ▶ 512 MB DDR-RAM
- ✓ FPGA System Processor
- ✓ FPGA Vision Processor
 - ▶ Xilinx Spartan 2
 - ▶ Xilinx Spartan 3
- ✓ Sustainable Transfer Rate (max.)
 - ▶ 850 MBytes/sec. 

Camera Interface

- ✓ Camera Link 
- Power over Camera Link 
- GigE Vision 



Camera Link Standards

- ✓ BASE Configuration
- ✓ Dual BASE Configuration
- ✓ MEDIUM Configuration
- ✓ FULL Configuration
- ✓ 10taps FULL Configuration

Camera Interface

- ✓ Camera Link Connectors
 - 2 MDR26
 - SDR26
- GigabitEthernet Connectors
 - RJ45

PC Interface

- PCI 32/64bit 
- ✓ PCI Express 
 - ▶ PCIe x1 (single lane)
 - ▶ PCIe x4 (quad lanes)

Connectivity Features

- ✓ GPIO/Trigger Connector
- ✓ PixelPlant Connector
- ✓ CLIO Connector

Acquisition Features

- ✓ Camera Pixel Clock Support
 - ▶ 85 MHz
- ✓ Area Scan Cameras
 - ▶ 32k * 64k max. image size
- ✓ Line Scan Cameras
 - ▶ 64k max. image width
- ✓ Grayscale Cameras
 - ▶ 8bit resolution
 - ▶ 16bit resolution
- ✓ Color Cameras
 - ▶ 24bit resolution (RGB)
 - ▶ 48bit resolution (RGB)
 - ▶ 24bit resolution (Bayer CFA)
 - ▶ 36bit resolution (Bayer CFA)
- ✓ Mixed Mode (requires VisualApplets)
 - ▶ Area Scan + Line Scan Cameras
 - ▶ Grayscale + Color Cameras
 - ▶ Arbitrary Combinations

AddOn Products

- ✓ GPIO/Trigger Boards
- ✓ GPIO/Trigger Boards, opto-isolated
- ✓ CLIO (Camera Link Replicator)
- ✓ PixelPlant (Processing Extension)

Physical Board Properties

- ▶ 168 mm length x 111 mm height
- ▶ Operating temperature 0°C - 40°C

Any information without obligation. Technical specifications and scope of delivery are liability-free and valid until revocation. Mistakes are excepted.



Image Acquisition Features

- Sensor Tap Sorting
 - Knee Lookup Table
 - Basic Image Processing, e. g. Brightness, Contrast and Gamma Correction
 - Internal 16bit Processing
 - Regions of Interest (ROI)
 - Minimal Latency of a Single Line
 - Hardware Generated Image Number
 - Camera Detection Abilities
 - No Need of Camera Configuration Files
 - Support of Camera Link RS232 Interface clser
 - Highly Customizable Trigger System
 - DigI/O and CC Signals
- ... and further ones

Special Features

- Shaft Encoder A/B Support (Revolving Direction Detection and Compensation)
 - Software Trigger Control
 - Support for Non-Standard Formats
- ... and further ones

Software Products

- ✓ Device Drivers
- ✓ Firmware Flasher
- ✓ microDisplay
- ✓ microDiagnostics
- GigE Explorer
- ✓ microEnable SDK

Processing Libraries

incl.	AcquisitionApplets
incl.	SmartApplets Base
opt.	SmartApplets Extended
incl.	VisualApplets Base
opt.	VisualApplets Blob
opt.	VisualApplets Compression

Processing Licenses (Base version)

- ✓ SmartApplets enabled
- ✓ VisualApplets enabled


Operation Systems

✓ Windows XP	32bit	64bit
✓ Windows Vista	32bit	64bit
✓ Windows 7	32bit	64bit
✓ Linux (Kernel 2.6.23+)	32bit	64bit

Hardware/Software Compatibility

- ✓ microEnable IV FULL x4
(is discontinued)

Scematic layout of microEnable IV VD4-CL

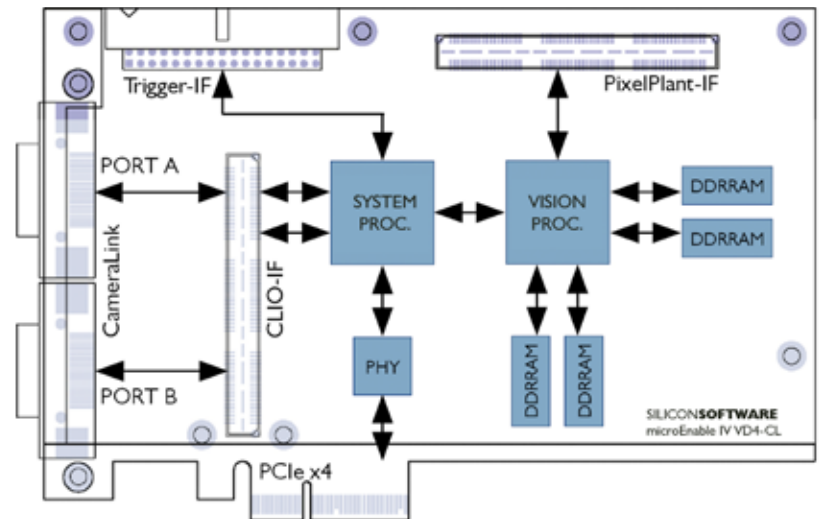

Supported Features Sorted by Hardware Applets for

microEnable IV VD4-CL

		Single Area Gray Shading 16	Dual Area Bayer 12	Dual Area Gray 16	Dual Area RGB 48	Dual Line Gray 16	Dual Line RGB 30	MEDIUM Area Gray 16	MEDIUM Area RGB 36	MEDIUM Line Gray 16	MEDIUM Line RGB 36	FULL Area Gray 8	FULL Line Gray 8
CameraLink	BASE Configuration	■	■	■	■	■	■						
	MEDIUM Configuration							■	■	■	■		
	FULL Configuration											■	■
Camera Type	Area Scan / Line Scan	A	A	A	A	L	L	A	A	L	L	A	L
	GrayScale / RGB / Bayer	G	BAY	G	RGB	G	RGB	G	RGB	G	RGB	G	G
	1- / 2-Camera Operation	1	2	2	2	2	2	1	1	1	1	1	1
	Color Processing	White Balancing	■	■		■		■		■		■	
Image Enhancement	Bayer Filter Feature		■										
	Bayer Bilinear Algorithm		■										
	Knee-LUT Table	■	■	■	■	■	■	■	■	■	■	■	■
Image Correction	Image Processing	■	■	■	■	■	■	■	■	■	■	■	■
	Sensor Correction	■	■	■	■	■	■						
	Shading Correction 1D					■	■						
Acquisition Modes	Shading Correction 2D	■											
	Image Selector	■	■	■	■	■	■	■	■	■	■	■	■
	Area Trigger	■	■	■	■			■	■			■	
Performances	Line Trigger					■	■			■	■		■
	Max. width (in k pixels)	8	16	16	8	16	16	16	16	16	16	16	16
	Max. height (in k lines)	4	64	64	64	64	64	64	64	64	64	64	64
Image Formats	Image frequency (in k fps)	10	10	20	20	10	10	10	10	10	10	10	10
	Gray8 or RGB24	■	■	■	■	■	■	■	■	■	■	■	■
	Gray16 or RGB 48	■	■	■	■	■	■	■	■	■	■	■	■

Any information without obligation. Technical specifications and scope of delivery are liability-free and valid until revocation. Mistakes are excepted.

