

Datasheet

Main Features

- Sensor: 1024 to 4096 Pixels, 10 or 14 μm square
- Camera Link® Interface (Base Configuration)
- Data rate: 40 Mpixels/s on Two Taps
- Bit Depth: 8 bits
- Dimensions: 60 x 60 x 45 mm (w, h, l)
- Antiblooming
- Cost effective and Easy to Use
- Fully Configurable with CommCam Software



Product Description

The DiViiNA camera is an easy-to-use and robust solution with very simple functionalities that provides the perfect image quality for mid-range applications. It has been specifically designed to provide the best answer to machine vision system integrators that are under cost reduction pressure but are eager to maintain high CCD performance. The DiViiNA cameras embed the proven quality 1024, 2048 and 4096 pixel sensors from e2v, running at 40 MHz and outputting 8 bits on Camera Link. They can be set through a flexible and easy serial control and triggered on free run and external trigger modes.

Typical Applications

- Web Inspection: Wood, Paper, Metallurgy
- Part inspection and sorting (Cotton, Rice, Food)
- General Machine Vision Inspection

Visit our website: www.e2v.com
for the latest version of the datasheet

1. Standard Conformity

The DiViINA cameras have been tested using the following equipment:

- A shielded power supply cable
- A camera Link data transfer cable ref. 14B26-SZLB-500-OLC (3M)

e2v recommends using the same configuration to ensure the compliance with the following standards.

1.1 CE Conformity

The DiViINA cameras comply with the requirements of the EMC (European) directive 89/336/CEE (EN 50081-2, EN 61000-6-2).

1.2 RoHS Conformity


DiViINA cameras comply with the requirements of the RoHS directive.

2. Key Specifications

Table 2-1. Typical Performances

Feature/Specification	Value			Unit
Camera characteristics				
Resolution	1024	2048	4096	Pixels
pixel size (square)	10 or 14	10 or 14	10	μm
Max line rate	35.7	18.1	9.5	kHz
Bit depth	8			Bits
Radiometric Performance at Camera Gain				
	Typical	Max		
Responsivity (14 μm pixels size)	12.5			LSB/(nJ/cm²)
Responsivity (10 μm pixels size)	5.8			LSB/(nJ/cm²)
Response nonlinearity	1	2		%
PRNU	5	10		%
Dynamic range	58			dB
Functionality (Programmable via Control Interface)				
Gain	Up to 30 dB			
Offset	Up to 63 LSB			
Trigger Mode	Free run, and external triggered			
Mechanical and Electrical Interface				
Size (w x h x l)	60 x 60 x 45			mm
Weight	210 g (without mount)			g
Lens Mount	M42 x 1 (by default) F (Nikon) or C optional mounts			
Sensor alignment	±200			μm
Sensor flatness	±30			μm
Power supply	Single 12 to 24			V
Power dissipation	<6			W
General Features				
Operating temperature	0 to 65 (front face)			°C
Storage temperature	−40 to 70			°C
Regulatory	CE, and RoHS compliant			


Figure 2-1. Image Sensor Response

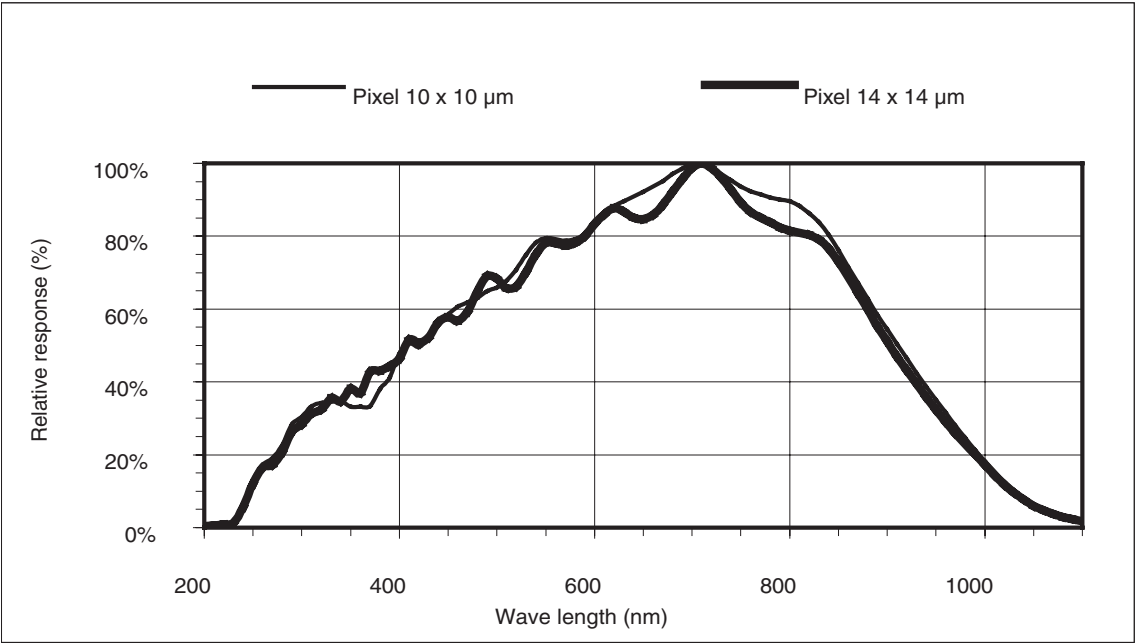

3. Camera Hardware Interface

3.1 Mechanical Drawings

Figure 3-1. Mechanical Drawings

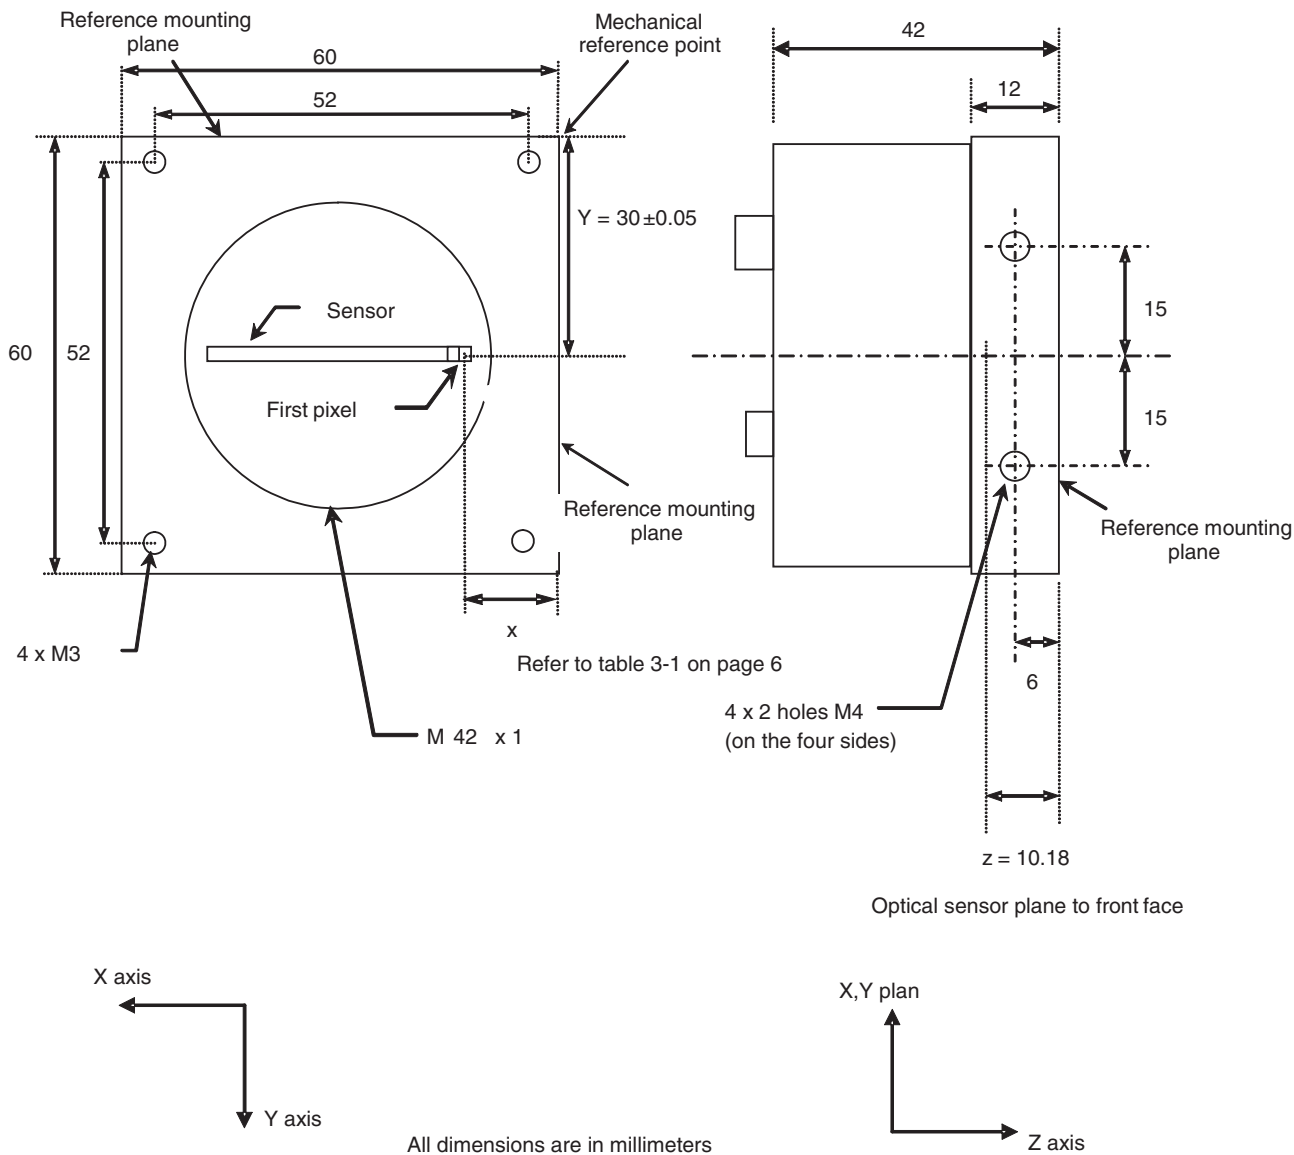


3.1.1 Sensor Alignment

Table 3-1. Sensor Alignment

Sensor Size (Pixels #)	1024	2048	4096
x with 14 µm sensor (nm)	20.83	13.66	
x with 10 µm sensor (nm)	22.88	17.76	7.52

Figure 3-2. Rear View

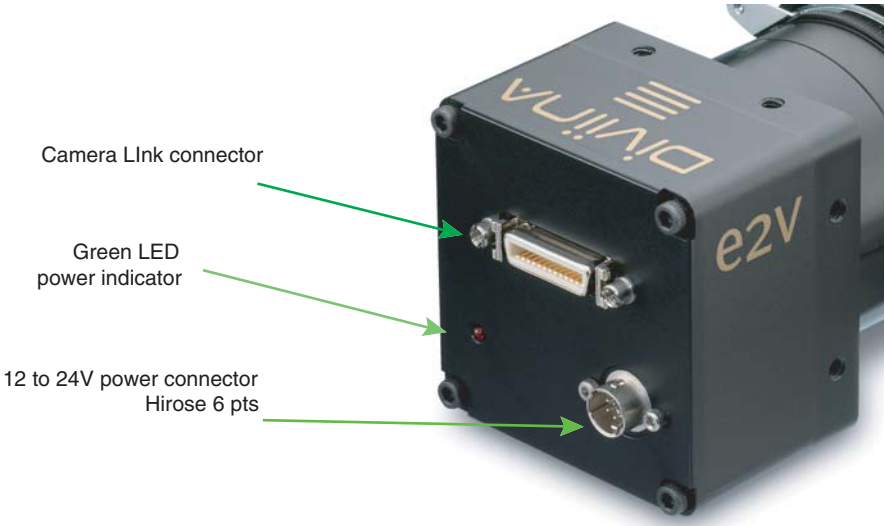

3.1.2 Power Connector

Camera connector type: Hirose HR10A-7R-6PB (male)

Cable connector type: Hirose HR10A-7P-6S (female)

Table 3-2. Power Connector

 Camera side description	Signal	Pin	Signal	Pin
	PWR	1	GND	4
	PWR	2	GND	5
	PWR	3	GND	6
Power supply from 12V to 24V Advised Power 7W with an inrush current of 1A during power up				

3.1.3 Camera Link Output Configuration

Port/Bit	Output Data
Port A0	A0
Port A1	A1
Port A2	A2
Port A3	A3
Port A4	A4
Port A5	A5
Port A6	A6
Port A7	A7
Port B0	B0
Port B1	B1
Port B2	B2
Port B3	B3
Port B4	B4
Port B5	B5
Port B6	B6
Port B7	B7

4. Camera Models

Table 4-1. Camera Models

Part Number	Sensor type (Resolution, Pixels size)	Description
Camera		
EV50YLM2CL1010-BA0	1024 pixels, 10 μm size	DiViINA LM2 CL 1010
EV50YLM2CL2010-BA0	2048 pixels, 10 μm size	DiViINA LM2 CL 2010
EV50YLM2CL4010-BA0	4096 pixels, 10 μm size	DiViINA LM2 CL 4010
EV50YLM2CL1014-BA0	1024 pixels, 14 μm size	DiViINA LM2 CL 1014
EV50YLM2CL2014-BA0	2048 pixels, 14 μm size	DiViINA LM2 CL 2014
Accessories		
EV50-MOUNT-F		F Mount for DiViINA
EV50-MOUNT-C		C Mount for DiViINA



How to reach us

Home page: www.e2v.com

Sales offices:

Europe Regional sales office

e2v ltd

106 Waterhouse Lane
Chelmsford Essex CM1 2QU
England
Tel: +44 (0)1245 493493
Fax: +44 (0)1245 492492
mailto: enquiries@e2v.com

e2v sas

16 Burospace
F-91572 Bièvres Cedex
France
Tel: +33 (0) 16019 5500
Fax: +33 (0) 16019 5529
mailto: enquiries-fr@e2v.com

e2v gmbh

Industriestraße 29
82194 Gröbenzell
Germany
Tel: +49 (0) 8142 41057-0
Fax: +49 (0) 8142 284547
mailto: enquiries-de@e2v.com

Americas

e2v inc

520 White Plains Road
Suite 450 Tarrytown, NY 10591
USA
Tel: +1 (914) 592 6050 or 1-800-342-5338,
Fax: +1 (914) 592-5148
mailto: enquiries-na@e2v.com

Asia Pacific

e2v ltd

11/F.,
Onfem Tower,
29 Wyndham Street,
Central, Hong Kong
Tel: +852 3679 364 8/9
Fax: +852 3583 1084
mailto: enquiries-ap@e2v.com

Product Contact:

e2v
Avenue de Rochepleine
BP 123 - 38521 Saint-Egrève Cedex
France
Tel: +33 (0)4 76 58 30 00
Hotline:
mailto: hotline-cam@e2v.com



Whilst e2v has taken care to ensure the accuracy of the information contained herein it accepts no responsibility for the consequences of any use thereof and also reserves the right to change the specification of goods without notice. e2v accepts no liability beyond that set out in its standard conditions of sale in respect of infringement of third party patents arising from the use of tubes or other devices in accordance with information contained herein.