

MetaBright Thin Backlight

Model#: MB-TBL2X8




- Configurable for various wavelengths
- Extremely low profile backlight for applications with strict spatial limitations
- No warm up time to reach full intensity
- Thin yet very high intensity & high uniformity (+/- 5%)
- High Uniformity (No hot spots or glare)
- High Density Precision Chips Tehcnology (HDPCT)
- Streamline design allows for maximum active area
- Light thickness: .39"

Active Area	Dimensions	Specifications:	
2in x 8 in 50.8mm x 203mm	2.82in x 8.32in x .39in 71mm x 211mm x 9.9mm	Current Consumption	RED: 0.65A W/G/B: 0.85A
		Finish	Powder Coated Black
		Intensity Uniformity	+/-5%
		Operating Temperature	120° F Max
		Illuminance	94.000 Lux
		Compliance	CE/RoHS
		Lifetime Hours	75,000 Hours

Wiring Diagram	
Flying Leads	Function
RED	+24VDC
BLACK	Ground

M12 Connector	
PIN #	Function
1	+24VDC
3	Ground

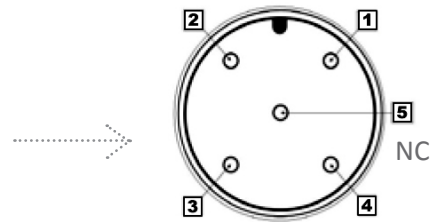

ORDERING INFORMATION:

• M B - T B L 2 X 8 - - 2 4 -

W	White 5500k	*BLANK	10 ft. Flying Leads
R	Red 630nm	T	M12 Quick Disconnect
G	Green 530nm	ILD	In Line Dimmer
B	Blue 455 nm	ILS	In Line Strobe (customer provide trigger info)
IRL	Infrared 880nm		
UVL	(long) 395nm		
UVS	(short) 365nm		

MetaBright Thin Backlight Model#: MB-TBL2X8

Drawing/Diagram

